



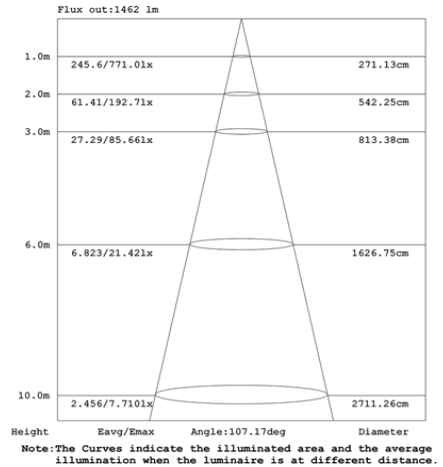

### FEATURES

- Excellent options structure: less lumen loss and better illumination effect
- LED chip with Lm80, CRI > 80
- Stable and efficient LED driver, with PFC solution (PF > 0.9)
- Fully dimmable and compatible with most existing dimmers
- Outstanding thermal solution allows for usage in commercial application
- Lifespan: > 50,000Hrs. Warranty: 5 years
- Environment-friendly and no UV or IR
- 0-10V Dimmable. 120° Beam angle
- Approved from ETL, Energy star, ROHS, etc.

### TEST RESULTS

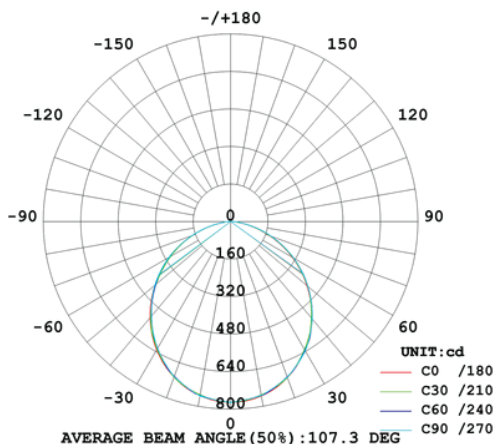

### ORDERING INFORMATION

Please create your model number by indicating your selection below. Example: EL-CR — 14W — 3K — UNV — 10T

EL-CR —  —  —  —  —  —

MODEL #	WATTS	LUMENS	COLOR (KELVIN)	VOLTAGE	OPTIONS
EL-CR	8-14W	1250 (83LM/W)	3K=3000 K	UNV = UNIVERSAL VOLTAGE 100-277 VOLT (0-10 VOLT DIMMABLE)  120V (LINE VOLTAGE DIMMABLE)	EM = BATTERY BACKUP
			4K=4000 K		10T = 10" TRIM ADAPTER
			5K=5000 K		
	CUSTOM WATTAGE AVAILABLE		ADJ = ADJUSTABLE KELVIN*		
	CW = SPECIFY WATTAGE				

\*REQUIRES EDGE DUAL CONTROLLER. SEE EDC SPEC SHEET.