

EDGELED™

FLAT PANEL LIGHTING

AVAILABLE IN - TUNABLE WHITE WITH INTEGRAL DIMMING



CRI > 80
PF > 0.95



COLOR KELVIN CAN BE ADJUSTED BETWEEN 3000K-5000K



3000K 3500K 4000K 4500K 5000K



DIMMABLE
100% -1%



FEATURES AND BENEFITS

- Lumen adjustable from 100% to 1%
- UL Listed with isolated external power supply
- LED Source: SMD2835 0.5W, CRI>80, LM80 report
- MS LGP, Anti-Yellow
- Optional Wall Controller: hard wired, no frequency disruption – designed for hospital standards
- CCT adjustable option from 3000K-5000K
- Lifespan: >50,000 Hrs, 5-year warranty, (additional 5-year warranty upon request)
- Approved from UL, DLC, ROHS, etc
- Weight: 2x2=3.7kg/pc
1x4=3.8kg/pc
2x4=7.2kg/pc

ORDERING INFORMATION

Please create your model number by indicating your selection below. **Example:** EL-FP — 22 — 25W-P — 30K — ECC

EL-FP — — - — —

MODEL #	SIZE	WATTAGE - DLC		COLOR TEMPERATURE	ACCESSORIES OPTIONS
		SELECT WATTAGE		CRI80 - KELVIN	ECC = EDGE CCT CONTROLLER EM = EMERGENCY BATTERY
EL-FP	22=2X2FT	40W-S= 4.3 STANDARD 110 LM/W	25W-P = 4.3 PREMIUM 130LM/W	30K=3000K 40K=4000K 50K=5000K ADJ = 30K-50K ADJUSTABLE*	
EL-FP	14=1X4FT	40W-S= 4.3 STANDARD 110 LM/W	25W-P = 4.3 PREMIUM 130LM/W		
EL-FP	24=2X4FT	50W-S= 4.3 STANDARD 110 LM/W	40W-P = 4.3 PREMIUM 130LM/W		

*REQUIRES EDGE DUAL CONTROLLER. SEE EDC SPEC SHEET.



EDGE LED

Published 2-27-2019



Phone: 858.810.8295
Email: info@edge-led.com
Web: edge-led.com



2X2 Luminous Intensity Distribution Diagram

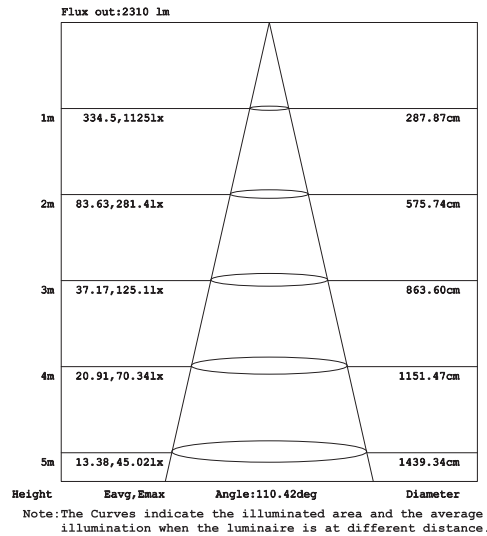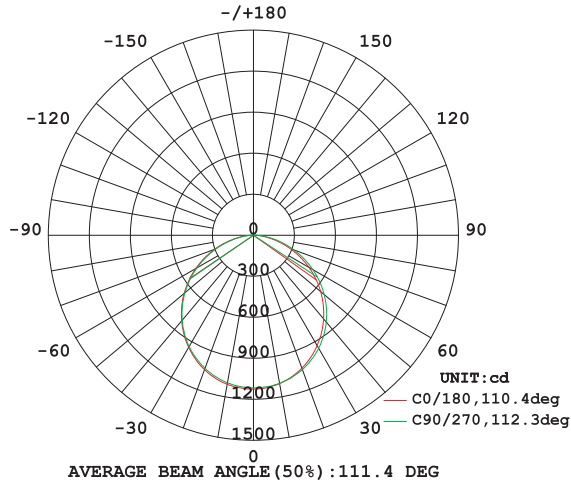

1X4 Luminous Intensity Distribution Diagram

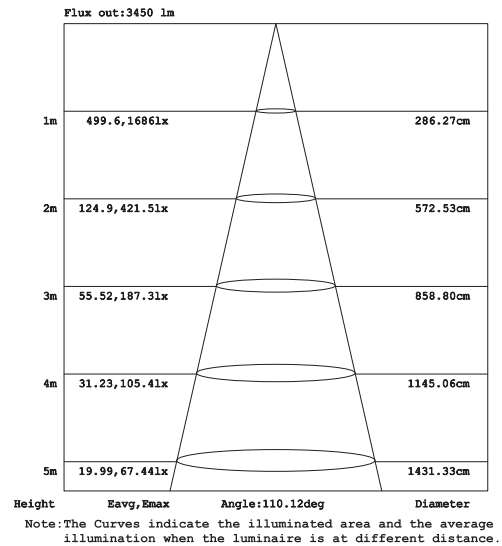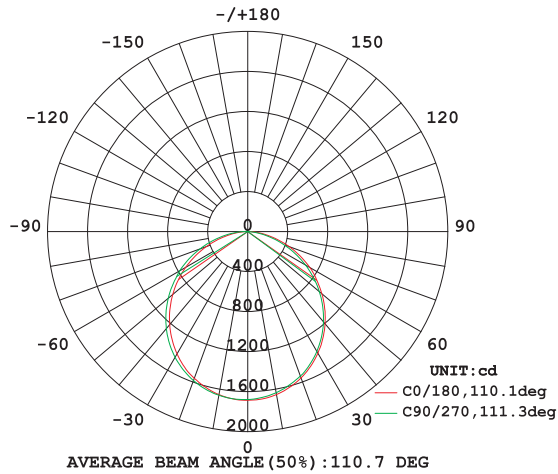

2X4 Luminous Intensity Distribution Diagram

